

#### Specifications

Height 1015mm Length 1610mm

Passage Width 600mm/900mm/Customized Total Width 940mm/1240mm

Barrier Elements Poly Carbonate

Housing, Base Columns Stainless Steel AISI 304/314

Finish / Material Stainless Steel / Aluminium /

PVC/ Customized

Drive Brushless Motor intergrated in bottom of Guiding Element;

Power Assisted;

Two-Servo-Postioning Drives/ Electronically Controlled in

**Both Directions** 

Operation Modes


Open or Closed


Access Control In/Out Reader, Visitor Dropbox

Electrical Components Fail Safe/ Power Failure

Power Supply110-230V AC 50/60 Hz Barrier Elements Can Be Moved Freely





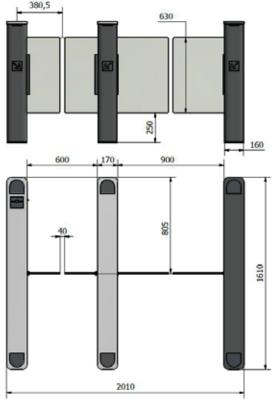

### Design and Function

## Top Cover



# Reader Dropbox



## Smart Management



Full on-line parameter setting and control function thru Wi-Fi enabled device

: +852 2375 6110

Fax : +852 2406 2602



Email : enquiry@aub.com.hk

www.aub.com.hk