




TOUCHLESS
FINGERPRINTING

3D TERMINAL

Three-dimensional and contact-free terminal for highest security and multifunctionality at point of access.


- 3D touchless technology
- Access Control, Time and Attendance (T&A)
- In- and outdoor use
- Flush or surface mount
- Highest security level
- Superior identification performance
- No "Failure to Enroll"
- Identification or verification
- Small- and large-sized user groups
- Personalizable touchscreen
- Variable configuration and customizing
- Optional RFID, camera, liveness detection
- Stand-alone and network capability
- Hygienic for sensitive applications

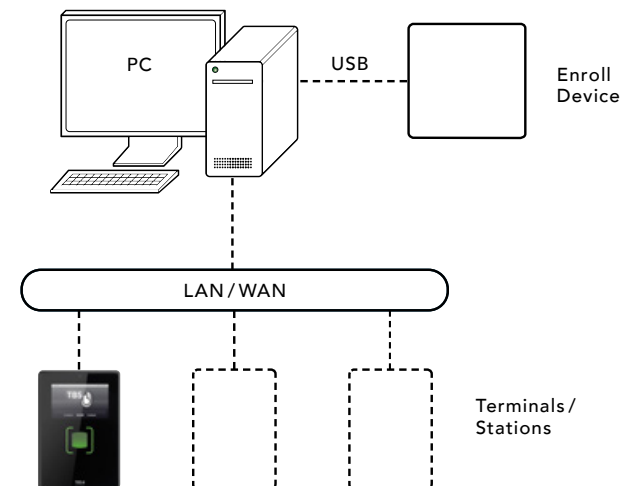

reddot design award
honourable mention 2012




3D TERMINAL



160 mm

Flush mount

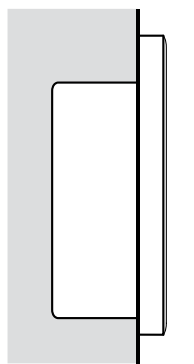

66 mm 22 mm

Wall mount



95 mm

230 mm

AUB Limited
Unit A, 12/F., Hung Mou Industrial Building,
62 Hung To Road, Kwun Tong,
Kowloon, Hong Kong

Tel. : +852 2375 6110
Fax : +852 2406 2602
Email : enquiry@aub.com.hk
www.aub.com.hk



		3D ENROLL	3D TERMINAL	2D ENROLL	2D TERMINAL	2D STATION	2D MINI	2D MINIHOME	1D TERMINAL	1D CARD STATION	SMART CONTROLLER
Applications	Access Control	•	•	•	•	•	•	•	•	•	•
	Time & Attendance	•	•	•	•	in/out	in/out		•	in/out	
	Civil /Criminal	•		•							
Sensor	Touchless, 3D-Multiview	•	•								
	Optical Touch, FBI-certified			•	•	•	•	•			
User Interface	5.0" Touchscreen		•								
	3.5" Touchscreen				•				•		
	RFID		(•)		(•)	•			•	•	
	PIN		•		•				•		
	Camera		(•)								
	Loudspeaker		•								
	Beeper					•	•	•	•	•	
Biometrics	Identification (1:N)		•		•	•	•	•			
	Verification (1:1)		•		•	•					
	1:N Database Size Limit		10'000 ¹		5'000	5'000	1'000	1'000	100'000	100'000	
	1:1 Database Size Limit		100'000		100'000	100'000	100'000	100'000	100'000	100'000	
	FRR at FAR 1:100 '000		<0.5%		<2%	<2%	<2%	<2%	0%	0%	
	Standalone Capability		•		•	•	•	•	•	•	
Communication	LAN		•		•	•	•	•	•	•	
	WLAN		(•)		(•) ²	(•) ²	(•) ²	(•) ²	(•) ²	(•) ²	
	USB	•		•							
Interfaces	RS 232 / RS 485		•		•	•	•	•	•	•	•
	Wiegand		•		•	•	•	•	•	•	•
	Relay Output		(2)		1	1	1	1	1	1	2
	I/O		(1/1)								2/2
Security	Liveness Detection	(•)	(•)								
	Multi-level Data Encryption		•		•	•	•	•	•	•	
	Template on Card		(•)		(•)	(•)					
	Anti-tampering / Silent Alarm		(•)		(•)	(•)	(•)	(•)	(•)	(•)	
Conditions	Input Supply Voltage DC	5V	9-30V	USB	9-30V	9-30V	9-30V	9-30V	9-30V	9-30V	9-30V
	Max. Power Rating	20W	25W		15W	10W	10W	10W	10W	10W	5W
	Operating Temperature in °C	0-60	-20-60	0-60	-20-60	-20-60	-20-60	-20-60	-20-60	-20-60	0-60
	Humidity	•	•	•	•	•	•	•	•	•	•
Mounting	Wall mount ³		•		•	•	•	•	•	•	•
	Flush mount / Outdoor ³		•		•	•	•	•	•	•	
	Outdoor kit ³		(•) ⁴		(•) ⁴	(•) ⁴	(•) ⁴	(•) ⁴	(•) ⁴	(•) ⁴	
Certifications	CE	•	•	•	•	•	•	•	•	•	•

(•) = optional

¹ = extendable

³ = all devices must be protected against direct sunlight

² = outside of device

⁴ = required if not sheltered