




## 3D FLY




Biometric terminal with world's fastest and most accurate "on-the-fly" identification for speed-lanes. High security and throughput delivering the best user experience.

- High-speed technology: Walk by. Fly through.
- Hand capture on-the-fly: secure & convenient
- Touchless & hygienic for maximum user comfort
- Four-finger-principle: lower false rejection by offering 4 biometric samples simultaneously
- Identification within a second
- Secure access control for high throughput situations
- Capacity for large user database
- Variable configuration and customizing
- Indoor installation

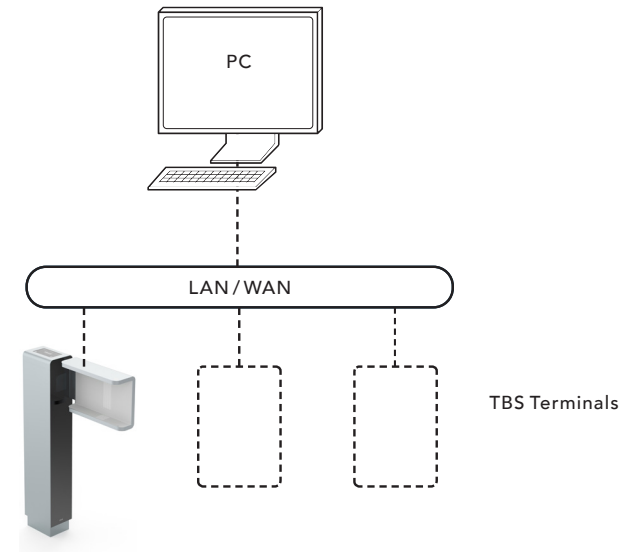



3D FLY

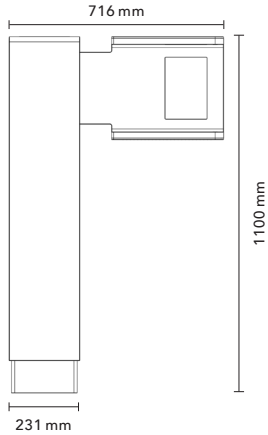

Touchless Biometric Systems AG  
 Rietbrunnen 2  
 8808 Pfäffikon SZ, Switzerland  
 tbs@tbs-biometrics.com  
 www.tbs-biometrics.com

- 1 = Extendable by license. Figure indicates single fingerprints, iris pairs or hands
- 2 = Indoor use only
- 3 = Mifare Classic/Desfire only
- (\*) = Required if not sheltered
- (•) = Optional, accessory or license needed
- 5 = Supported bands:  
 LTE FDD: B1/B3/B7/B8/B20/B28A  
 WCDMA: B1/B8, GSM: B3/B8
- 6 = Either/or, specify RS type upon order

	3D ENROLL (Series 22)	2D ENROLL	3D FLY	3D AIR (Series 22)	3D LIGHT	2D IRON HD	2D IRON	2D SENSE	2D TIME	2D MOVE	TBS EDGE	
Applications	Access Control		•	•	•	•	•	•			•	
	Time & Attendance, Workforce Management		•	•	•	•	•	•	•	•		
Sensor	Touchless Hand Scanner		•									
	Touchless 3D Finger Scanner		•	•								
	Touchless Iris Scanner				•							
	Finger optical multispectral					•	•					
	Finger capacitive							•	•	•		
	Thermal camera				(•)							
User Interface	Touchscreen size in inch		7.0	5.0	5.0	5.0	5.0	3.5	9.0	7.0		
	RFID			(•)	(•)	(•)	(•)	(•)		(•)		
	PIN		•	•	•	•	•	•	•	•		
	Loudspeaker		•	•	•	•	•					
	Beeper							•				
Biometrics	Identification (1:N), database size limit <sup>1</sup>		10'000	10'000	10'000	10'000	10'000	5'000	5'000	5'000	special	
	Verification (1:1), database size limit		100'000	100'000	100'000	100'000	100'000	100'000	100'000	100'000	100'000	
	FRR at FAR 1:100'000		<0.5%	<0.5%	<0.5%	<0.5%	<1.0%	<1.0%	<2.0%	<2.0%		
Communication	LAN		•	•	•	•	•	•	•	•	•	
	Wifi			(•)	(•)	(•)	(•)	(•)	•	•		
	Mobile <sup>5</sup>								•	•		
Interfaces	RS-232 and RS-485		•	•	•	•	•	•			•	
	Wiegand out		•	•	•	•	•	•			•	
	Relay (NO/NC selectable)		2	1	1	1	1	1			2	
	GPIN/GPOUT		2/2	2/2	2/0	2/2	2/2	3/1			2/2	
Security	Liveness detection			(•)		(•)	(•)					
	Multi-level data encryption		•	•	•	•	•	•	•	•	•	
	Template on card			(•)		(•)	(•)	(•)				
	Anti-tampering			•		•	•	(•)				
Installation	Input supply voltage DC		5	USB	24	12-24	12-15	12-24	12-24	12	USB	12-24
	Max. power rating in W		10		100	11	16	7	5	10		15
	Power over Ethernet					•	(PoE+)	•	•	(•)		(PoE+)
Conditions	Operating temperature in °C		0 to 60	0 to 60	0 to 45	-20 to 60	0 to 45	-20 to 60	-20 to 60	0 to 35	0 to 35	0 to 45
	Humidity 10-90%		•	•	•	•	•	•	•	•	•	•
Mounting	Wall mount WM-Box <sup>2</sup>					•	•		•	•	•	
	Wall mount HD-Box					IP54		IP65				
	Flush mount FM-Box (IP54)					•		•	•			
Certifications	Outdoor protection kit					(•) <sup>4</sup>			(•) <sup>4</sup>			
	CE		•	•	•	•	•	•	•	•	•	
	FCC/IC		•	•	•	•	•	•	•	•	•	

09/2022



Unit A, 12/F, Hung Mou Industrial Building,  
 62 Hung To Road, Kwun Tong,  
 Kowloon, Hong Kong

Tel : +852 2375 6110  
 Fax : +852 2406 2602

Email : enquiry@aub.com.hk  
 www.aub.com.hk