

LOCINOX

Let's make it better together

GATE CLOSERS & ACCESS CONTROL

Discover our innovative solutions



Our Story



www.aub.com.hk




We focus on Commercial, Institutional, Industrial and Residential projects in Hong Kong and Macau.

AUB offers a wide portfolio of Products & Solutions including Automatic Doors, high-performance Windows and Entrance Doors, Security Gates, Industrial Doors, Access Control and Door Hardware & Ironmongery.

Service is our Value - we are supporting our customers with Design Development, Technical Advice & Customized Drawings, Ironmongery Schedules, Master Key Plans, Sourcing, Supply & Installation, Training and Service & Maintenance programs.

Key partners and suppliers include GILGEN Door Systems, EFAFLEX High-Speed Doors, HART Security Shutters, TESA Access Control, TBS Biometric Solutions, SAELZER high-security Doors, AIR-LUX Window Systems and SILBER Doors & Windows and many more.

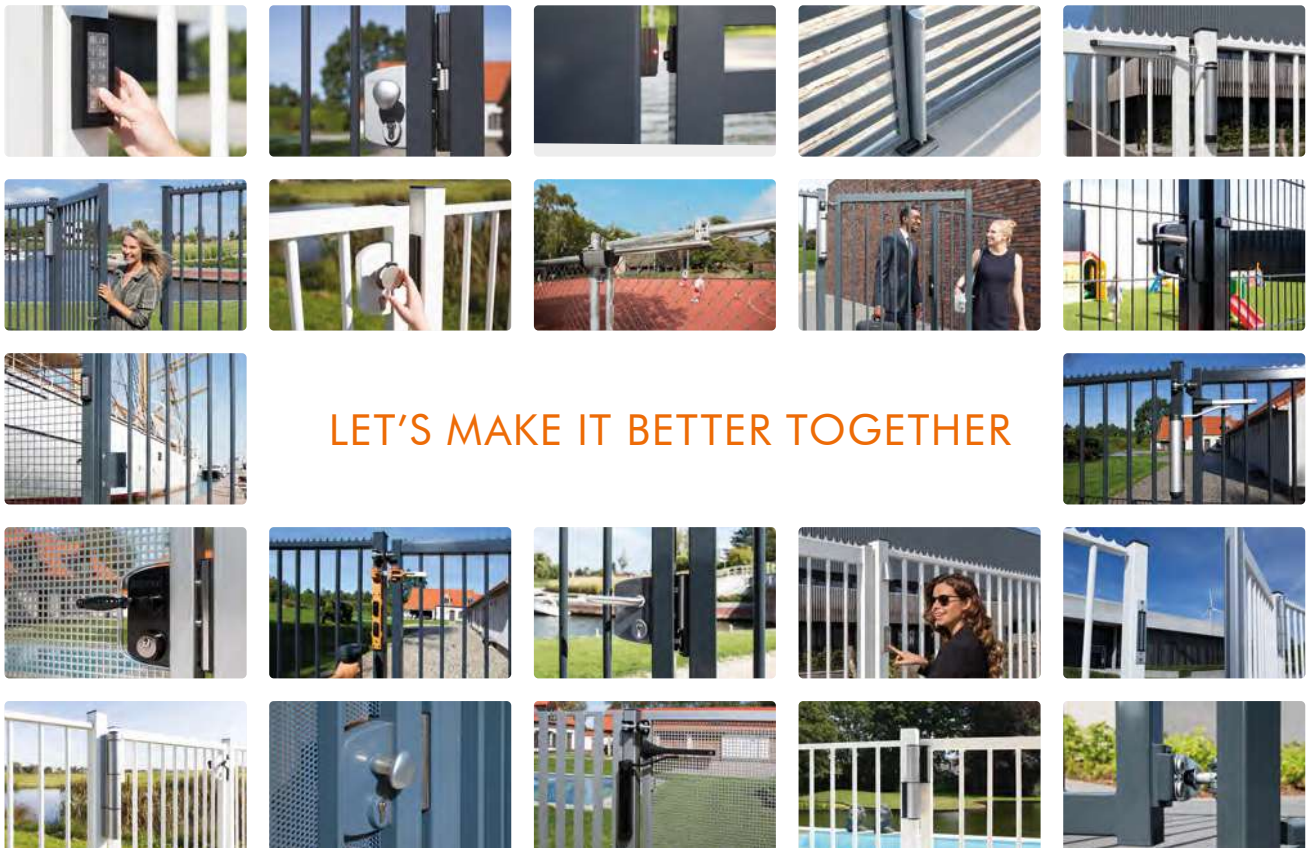

LET'S MAKE IT BETTER TOGETHER

INDEX

Our Concepts	2
Gate closers	4
Access contro & locks	15
Magnetic locks	19

A COUPLE OF TIPS!



Most Locinox products are fitted with the patented Quick-Fix. This highly innovative and extremely strong anchor bolt resists a pulling force of 1000 kg per Quick-Fix.



Choose between many colours, whichever matches your gate best.



Most of our products are developed for left and right hand gates.



Discover installation videos and quality tests on our website



All products in this brochure are in stock and can be shipped within 24h.

OUR CONCEPTS



AUTOMATED SWING GATE

SLIMSTONE Sturdy, weather resistant keypad (IP68) | **ELECTRADROP** Motorised electrical dropbolt
OGS Off-centered ground stop and catch | **1DBH-90°** 2-way adjustable bearing hinge
TRICONE Design led lighting for gates (IP54)



SELF-CLOSING PEDESTRIAN GATE WITH ELECTRIC LOCK

SAMSON-2
 Versatile hydraulic gate closer
GBMU4D
 4-way adjustable, 180° hinge
SLIMSTONE
 Sturdy, weather resistant keypad (IP68)
LIKQ U2
 Electric lock - Fail Close
SHKL QF
 Security keep and gate stop
DVK
 Guiding cable
PB-1 + DC-POWER-12V-20W
 Powerbox - Transformer housing (IP66)
 + Safety power supply 12 V and 13 V DC
TRICONE
 Design led lighting for gates (IP54)



SELF-CLOSING PEDESTRIAN GATE WITH MAGNETIC LOCK

MAMMOTH-180

Hydraulic 180° gate closer
and hinge in one

SLIMSTONE

Sturdy, weather resistant keypad (IP68)

MAG

Magnetic lock with integrated handles

DINO

180° double bearing hinge with
2 x 20 mm adjustability

PB-1 + DC-POWER-12V-20W

Powerbox - Transformer housing (IP66)
+ Safety power supply 12 V and 13 V DC

TRICONE

Design led lighting for gates (IP54)



SELF-CLOSING RESIDENTIAL GATE WITH ELECTRIC KEEP

LION

Compact and polyvalent gate closer,
fits every gate situation

SLIMSTONE-2

Sturdy, weather resistant keypad
(IP68)

LAKQ U2

Industrial gate lock

MODULEC-SA

Surface mounted electric strike
(Fail Close)

G90Z

90° adjustable hinge

TRICONE

Design led lighting for gates (IP54)

PB-1 + DC-POWER-12V-20W


Powerbox - Transformer housing (IP66)
+ Safety power supply 12V and 13V DC

SELF-CLOSING HYDRAULIC GATE CLOSERS

1 ALWAYS A CONSTANT CLOSING SPEED FROM FREEZING WINTER TO SIZZLING SUMMER

If your gate closes too slow, children or pets could sneak through. If your gate closes too fast, it might become a problem for wheelchair users. A loud slamming gate is not only annoying for you or your neighbours, it's also harmful for your gates.


The Active Thermal System, our own cutting-edge development, guarantees a constant closing speed, regardless of the outside temperature.

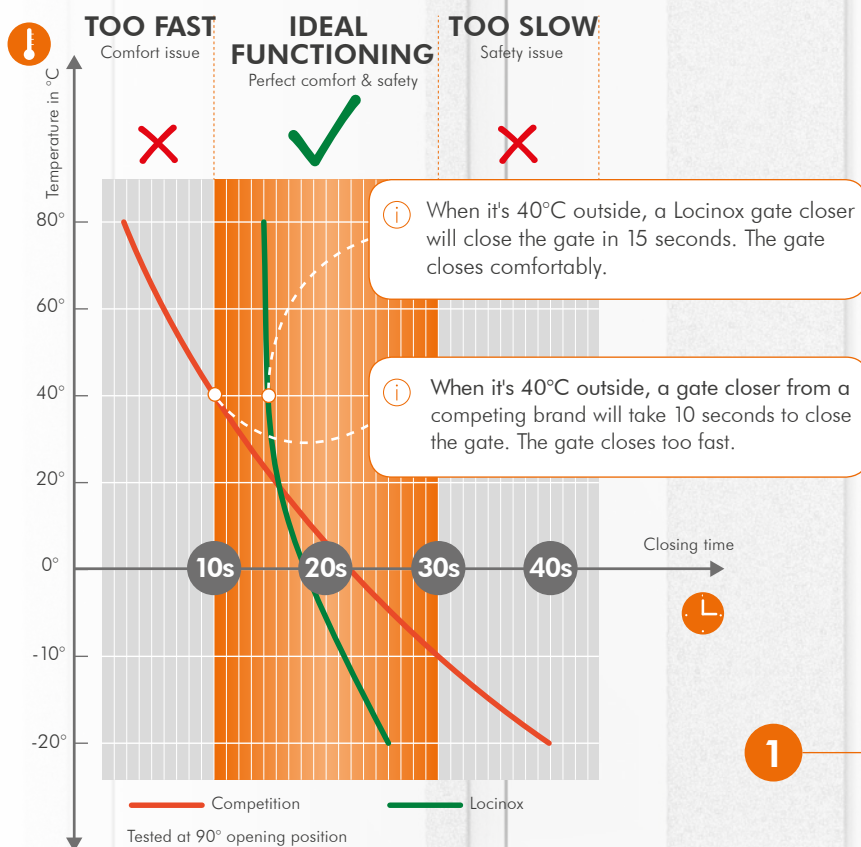

2 ADJUST SPEED AND FINAL SNAP PRECISELY

Some customers prefer their gate to close slowly, while others want it to go a little faster. No problem! All of our hydraulic gate closers can easily be adjusted in a matter of seconds to the wishes of your customers.

The final snap allows the gate to speed up a little at the end: this way, you are reassured the gate is properly closed. The final snap can easily be adjusted to any need.

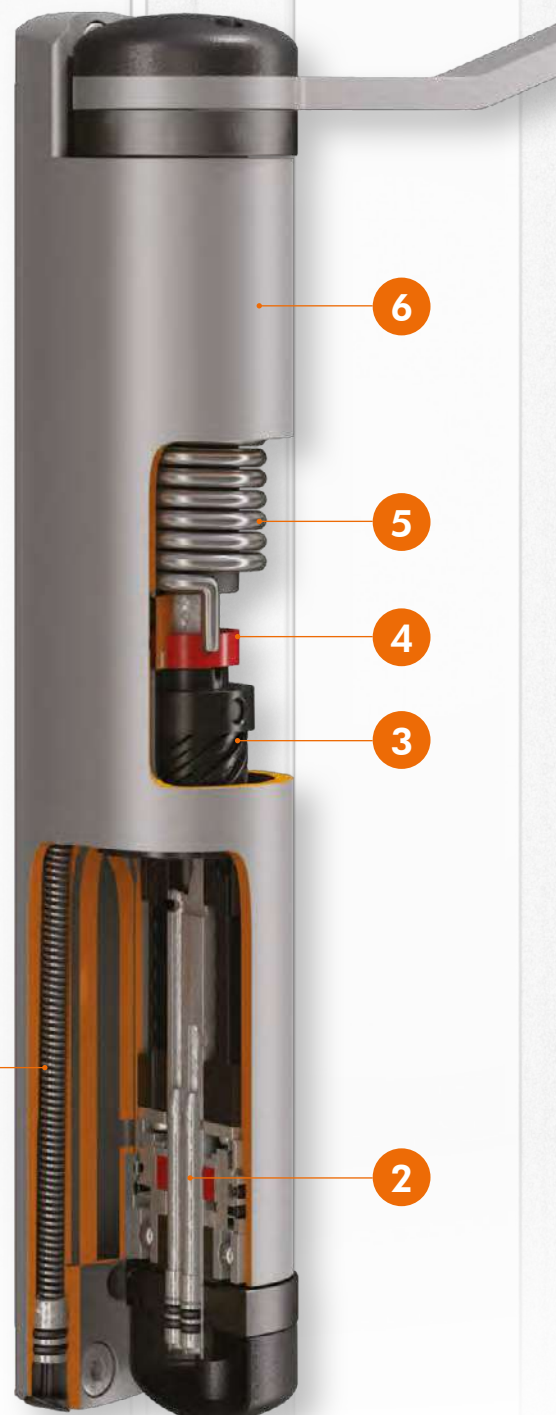

3 FUNCTIONS COMFORTABLY

The in-house developed High-Helix screws guarantee a consistent functionality and ensure a comfortable opening speed for the elderly or disabled.

5 CLOSES EVERY TIME

The powerful torsion spring guarantees the necessary closing force. Therefore, your gate will always close: unaffected by strong winds, the width of your gate wing or the outside temperature. You can rest assured.


4 DUST- & WATERPROOF

Our gate closers are equipped with rotary seals. These seals protect the gate closers from dirt and dust particles intruding the mechanism, assuring your customers of worry-free functioning for many years to come.

6 100% PROTECTED

The aluminium anodized housing guarantees full protection against any weather conditions. The housing is windproof, frost-free and dust- & waterproof, allowing your gate closer to function perfectly.

A GATE CLOSER FOR EVERY GATE

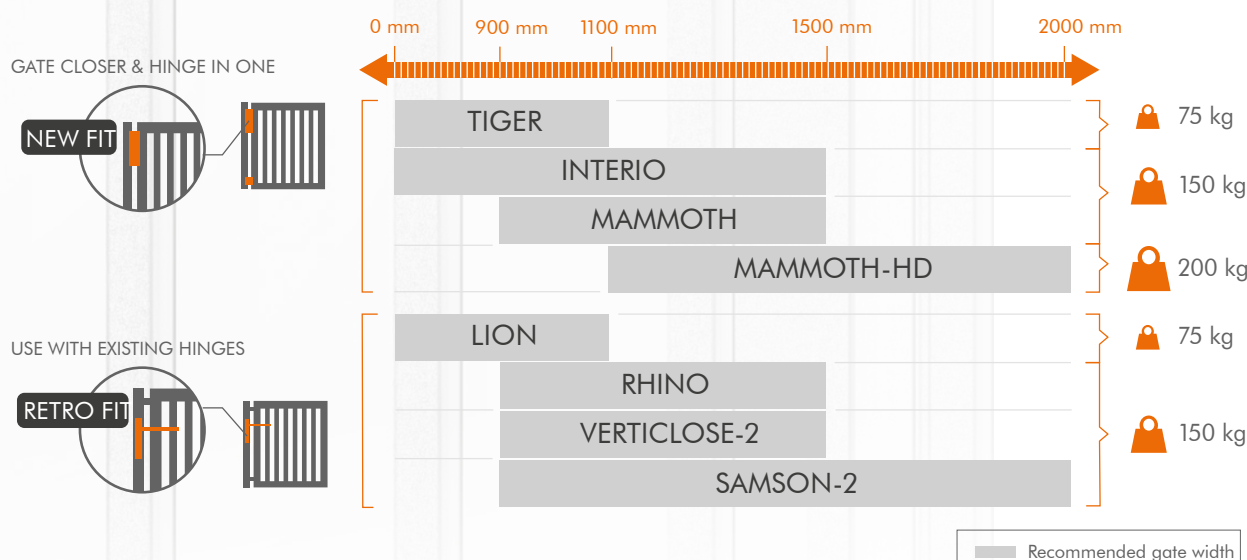

GATE CLOSER & HINGE IN ONE




USE WITH EXISTING HINGES




OPENING ANGLE

ALL LOCINOX GATE CLOSERS

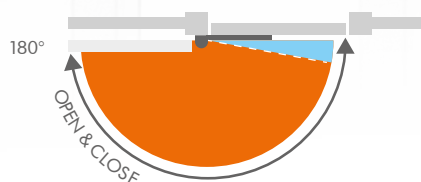

SAMSON GATE CLOSER



Self-closing
Final snap

Max 150° depending on position of hinge and gate closer

Find your gate closer thanks to our handy gate closer configurator on www.locinox.com



NEW Invisible, built-in hydraulic gate closer

INTERIO (Patented)

The invisible Interio gate closer, with matching hinge set, is completely built into the gate frame. This highly aesthetic solution opens and closes the gate comfortably. The integrated pretension ensures an efficient and flawless installation where speed and final snap can be adjusted accurately to fit any need.

**Color options****9005****Specifications**

- ✓ Self-closing up to 125° (depending on the situation) with adjustable closing speed and final snap
- ✓ Powder coated aluminium housing
- ✓ Constant closing speed in hot or cold weather
- ✓ Vandal-proof
- ✓ For left & right turning gates
- ✓ Secure, fast and easy attachment thanks to Quick-Fix mounting bolts
- ✓ Optional sets available for ground and wall installation
- ✓ Recommended with Gatestop

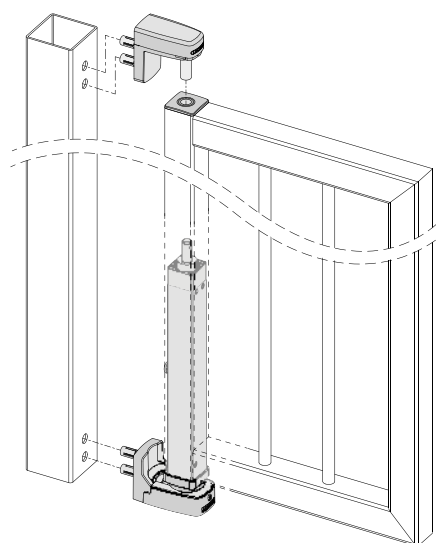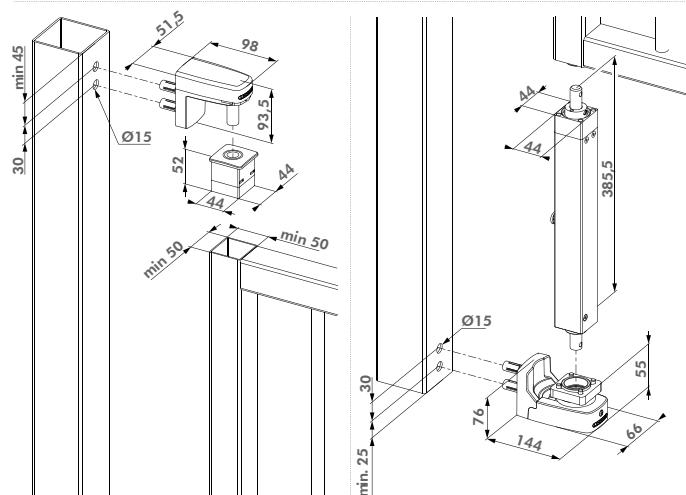**Order code****INTERIO** Hydraulic built-in gate closer for gates up to 150 kg**Compatible products**INTERIO-
GROUND-9005INTERIO-
WALL-9005



**A SILENT
OPENING &
CLOSING**



**SAFE
FOR
WHEELCHAIR
USERS**

EXCEPTIONAL
PRECISE ADJUSTMENT OF
SPEED & FINAL SNAP
FOR YOUR
COMFORT



**VANDAL
PROOF**

10

**FEATURES
SETTING LOCINOX
GATE CLOSERS APART!**



**CHILD
& PET
FRIENDLY**

**EFFICIENT
INSTALLATION
FAST & EASY**



**DURABLE
TESTED FOR
500 000
MOVEMENTS**



**100%
HYDRAULIC
GREEN &
MAINTENANCE
FREE**

EXTREME
WEATHERPROOF
CONSTANT CLOSING SPEED

10 30° ► + 70°C



**3 YEAR
WARRANTY**

Compact hinge and gate closer in one

TIGER (Patented)

180° self-closing hydraulic hinge with precise adjustments on speed and final snap. The aluminium powder coated housing and unique high-tech components allow the Tiger to function perfectly in any weather situation. We highly recommend the Tigerdrill for an even more efficient installation. The Puma hinge is included.



Color options


ZILV 9005

Specifications

- ✓ Automatic 180° closure with adjustable closing speed and final snap
- ✓ Aesthetic design
- ✓ Powder coated aluminium housing
- ✓ Closing speed unaffected by humidity and temperature changes
- ✓ Vandal-proof
- ✓ For left and right turning gates
- ✓ Fast and easy fixing with Quick-Fix
- ✓ 15 mm horizontal adjustability
- ✓ 20 mm vertical adjustability
- ✓ Easy to open: Max. 14 Nm

Order code

TIGER Hydraulic gate closer and Puma 180° hinge for gates up to 75 kg

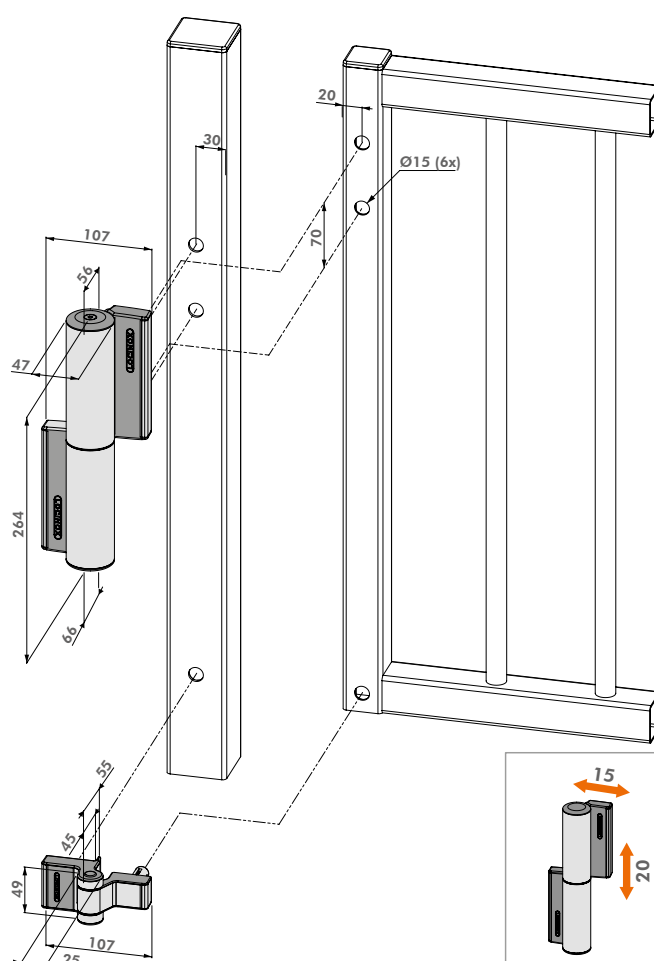

Recommended installation tools



TIGERDRILL



DRILLVISE-II



DRILLVISE-IV



CLB-TIGER

Hydraulic 180° gate closer and hinge in one

MAMMOTH-180 (Patented)

Elegant and powerful self-closing hinge for 180° gate situations. Mammoth is perfectly fit for gates up to 150 kg and 1500 mm wide. It is equipped with a double bearing for exceptional functionality. The Active Thermal System guarantees a constant closing speed, unaffected by weather conditions. The Dino hinge is included.



Color options


ZILV 9005

Specifications

- ✓ Self-closing hinge with patented hydraulic damping
- ✓ Aesthetic design
- ✓ Powder coated aluminium housing
- ✓ Closing speed unaffected by temperature changes
- ✓ Easy to open: Max. 16 Nm
- ✓ Vandal-proof
- ✓ For left and right opening gates
- ✓ Easy mounting with Quick-Fix
- ✓ 2-dimensionally adjustable (2 x 20 mm)

Order code

MAMMOTH-180 Stylish hydraulic gate closer for heavy gates

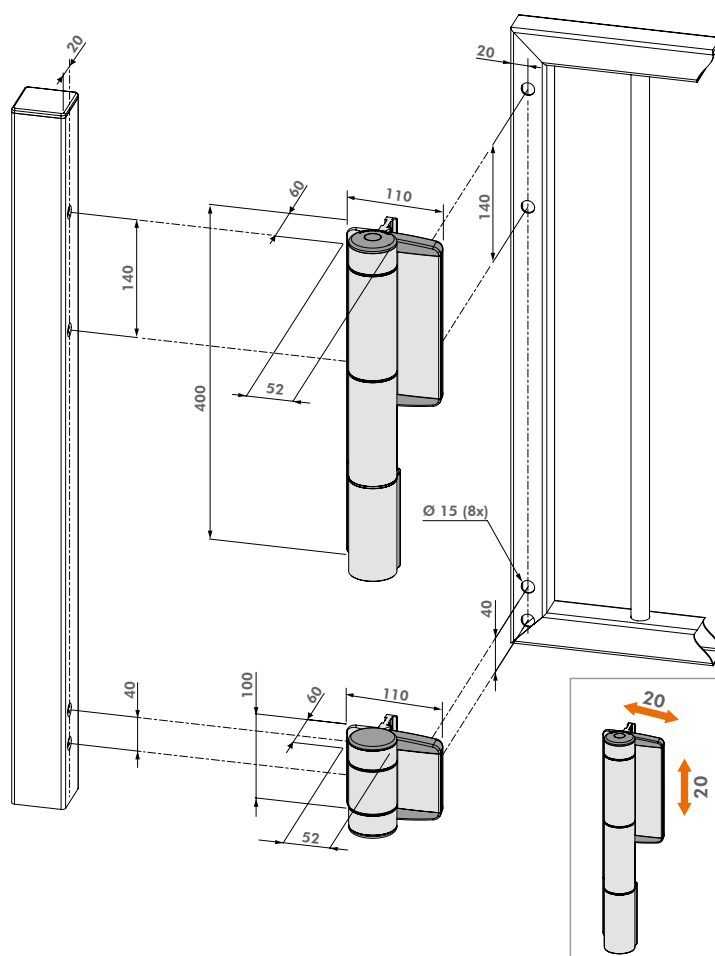

Recommended installation tools



DRILLWISE-II



DRILLWISE-IV



CLB-MAMMOTH

NEW Highly powerful hydraulic 180° gate closer and hinge-in-one

MAMMOTH-HD- (Patented)




Color options

9005 ZILV

- ✓ 180° hydraulic gate closer with adjustable speed and final snap
- ✓ Aesthetic design
- ✓ Powder coated aluminium housing
- ✓ Closing speed unaffected by temperature changes
- ✓ Easy to open: Max. 30 Nm
- ✓ Vandal-proof
- ✓ For left & right turning gates
- ✓ Easy mounting with Quick-Fix

Order code

MAMMOTH-HD- Highly powerful hydraulic 180° gate closer and hinge-in-one, for gates up to 200 kg

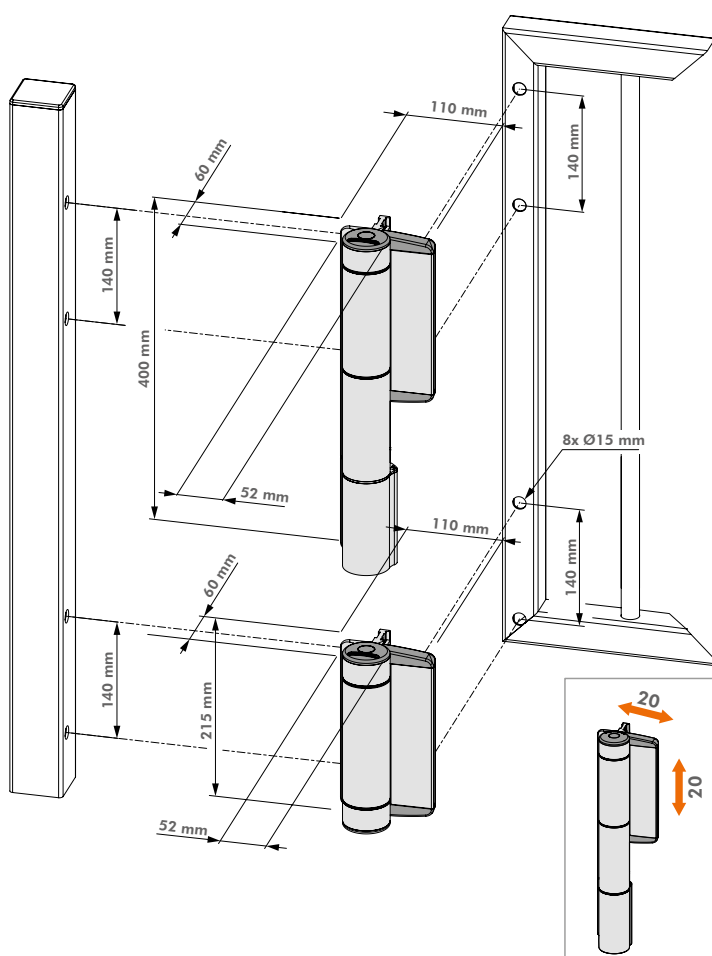

Recommended installation tools



DRILLWISE-II

DRILLWISE-IV

Compact and polyvalent gate closer, fits every gate situation

LION (Patented)

The attractive and compact Lion gate closer is unique in its kind. This hydraulic all-rounder is fit for every possible gate situation. Moreover, both 90° and 180° railsets are included in the package, allowing for more flexibility on site. The anodised aluminium housing combines a handsome look with a durable and spotless functioning for many years. Choose the Lion-VTC Drill for an even faster installation.





Color options

ZILV 9005

Specifications

- ✓ Automatic 180° - closing with adjustable closing speed and final snap
- ✓ Railset included for 90° and 180° situations
- ✓ Scratch resistant and corrosion free anodised aluminium housing
- ✓ Compact & aesthetic design
- ✓ Closing speed unaffected by temperature changes
- ✓ For left & right turning gates
- ✓ Integrated pre-tension for extremely smooth installation
- ✓ Easy & fast mounting: Quick-Fix

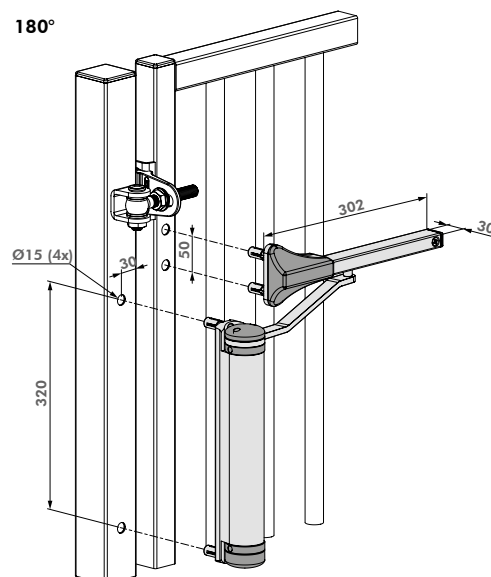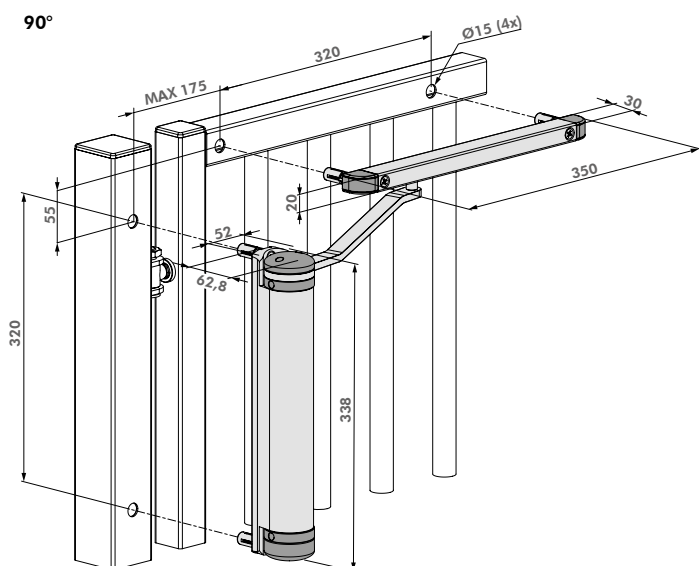

Recommended installation tools



LION-VTC-DRILL

DRILLWISE-II

DRILLWISE-IV

Order code

LION Compact hydraulic gate closer for any situation

Powerful and all-round hydraulic gate closer for wall mounting

VERTICLOSE-2-WALL- (Patented)

The Verticlose-2 Wall gate closer has been specifically designed for wall mounting where the gate closer itself is positioned 90° in relation to the gate. The specially designed arm turns around the wall or post, ensuring a large opening angle. The aesthetic anodised aluminium gate closer with high-tech internal components ensures an exceptionally long life span.



Color options



ZILV

Specifications

- ✓ Self-closing gate closer with adjustable speed and final snap
- ✓ Specially designed arm for wall mounting while guaranteeing a big opening angle
- ✓ Scratch resistant and corrosion free anodised aluminium housing
- ✓ Aesthetic & compact design
- ✓ Integrated pretension for extra smooth installation
- ✓ Closing force over the full 180° opening angle
- ✓ Firmly fixed thanks to patented Quick-Fix system

Order code

VERTICLOSE-2-WALL- Powerful and all-round hydraulic gate closer for wall mounting

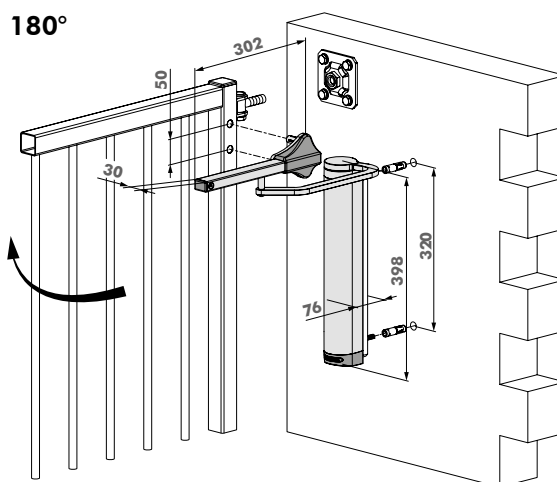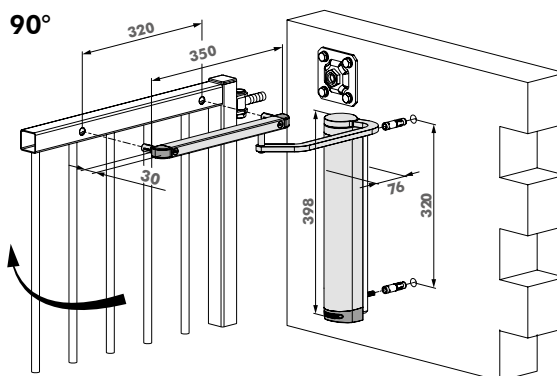

Recommended installation tools



LION-VTC-DRILL

DRILLVISE-II

DRILLVISE-IV

ACCESS CONTROL & LOCKS

The SlimStone-2 keypad with two integrated relays sets the new standard! With an IP 68 value SlimStone is designed to smoothly endure the most extreme weather conditions. Moreover, the Smart Heating System guarantees a frost-free and perfectly working keypad during winter time.

SlimStone-2 can monitor all Locinox access control products, as for example the surface mounted Modulec electric strike or our range of magnetic locks. Locinox automation products also fit this range. A quick and efficient installation ensures comfort and peace of mind.



Timesaving



Weatherproof



Quick-Fix fixation




IP68



Strong, frost-free and watertight keypad with integrated relay SLIMSTONE-

The SlimStone keypad with integrated led lighting is unique in its kind thanks to its strength. The keypad was developed and tested for use in the most extreme weather conditions. Assembly and mounting are very easy. Thanks to the integrated relay, with a common open and closed contact, both the coupling to Locinox and other automation products and the programming of the SlimStone is very easy.

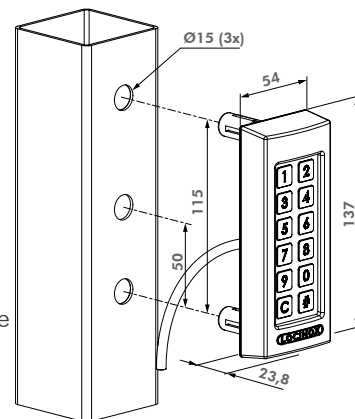

Color options

ZILV 9005

Specifications

- ✓ IP68 rated - Extremely resistant to water and dust
- ✓ Aluminium vandal-proof housing with scratch-resistant textured lacquer
- ✓ Energy efficient adjustable white led lights
- ✓ Highly resistant stainless steel push buttons tested for 1,000,000 pushes and more
- ✓ Easy programming of up to 100 user codes
- ✓ Frost-free thanks to smart heating
- ✓ Tested from -30 up to +85° Celsius
- ✓ Time range adjustable between pulse and timer mode (100ms - 99s)
- ✓ Working voltage keypad from 10 up to 26 Volt AC/DC
- ✓ Current: 1.0 A (with heating) / Pmax= 13,5W (with max heating)
- ✓ 2 m connection cable included

Order code

SLIMSTONE- Weatherproof keypad with integrated relay, Input voltage 10 to 26 V AC/DC

Compatible products



MODULEC-SA



MODULEC-SH



LIKQ U2



B-MAG-





Surface mounted electric gate lock with Fail Close functionality

LIKQ U2 (Patented)

Electric gate lock made of excellent quality with aluminium housing and stainless steel mechanism. This gate lock blocks the handles when there is no power (Fail Close). The 20 mm continuous adjustability of the bolts allows a perfect latching / locking of the mechanism. A solid stainless steel deadbolt with 23 mm throw guarantees a secure closure. For a fast and highly precise installation, we recommend using the Drill-Fix drilling jig.




Lockbox color options

ZILV 6005 6009 7016 9005 9010

Specifications

- ✓ ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test
- ✓ Fail Close: Lock is closed when power is interrupted
- ✓ Blocking or releasing of the handles
- ✓ Easy left or right changing
- ✓ 23 mm throw of the dead bolt, in 1 turn of the key
- ✓ Key-operated self-latching bolt
- ✓ Continuous adjustment of the daybolt up to 20 mm without dismantling the lock box
- ✓ 4-hole fixing with two hexagon socket head screws
- ✓ Interchangeable with all Locinox locks
- ✓ Voltage: 12V AC/DC
- ✓ Current: 0,3A

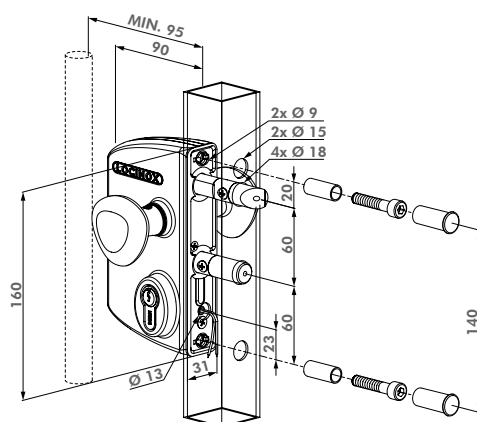

Recommended keeps



SAKL QF



SHKL QF

Order codes

For square profiles

LIKQ3030 U2L Adjustable from 30 mm to 50 mm

LIKQ4040 U2L Adjustable from 40 mm to 60 mm

LIKQ6060 U2L Adjustable from 60 mm to 80 mm

For round profiles

LIRQ3030 U2L Adjustable from 30 mm to 50 mm

LIRQ4040 U2L Adjustable from 40 mm to 60 mm

LIRQ6060 U2L Adjustable from 60 mm to 80 mm



Recommended handles & Cable guiding



3006R



3006C



DVK-HD



DVK

Recommended power supplies



DC-ACCESS-12V-20W



AC-TRANS-12V-25W



DC-POWER-12V-20W




Electric keep for surface mounted locks

SE (Patented)

Electric strike for swing gates. The strike is equipped with a blocking system that withstands 500 kg pulling force. The deadbolt receiver has been reinforced with stainless steel. This innovation makes the strike even more robust. This keep is extremely strong and the ideal solution for all your access control. SE is available in two versions: E (Emissa - Fail Close) and R (Ruptura - Fail Open).

Specifications

- ✓ Type SE.E: Emissa - Fail Close
- ✓ Type SE.R: Ruptura - Fail Open
- ✓ Nightbolt receiver reinforced and out of stainless steel
- ✓ For post profiles of 50 mm and more
- ✓ Voltage: 12V AC/DC
- ✓ Current Emissa: 1A
- ✓ Current Ruptura: 1,5A
- ✓ Water resistant & weatherproof
- ✓ Pressure resistance on self-latching bolt: 500 kg

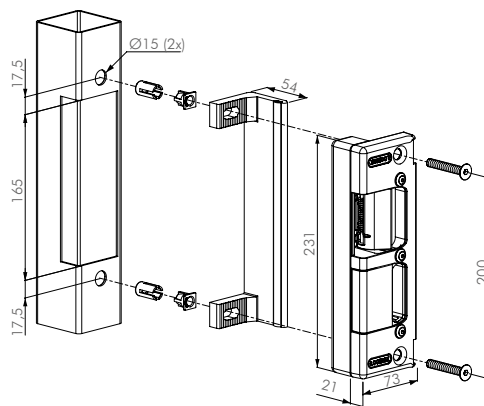

Compatible locks



Order codes

- SE-E Electric strike, Emissa, Fail Close
SE-R Electric strike, Ruptura, Fail Open




Electric keep for insert locks

SEH (Patented)

Electric strike for H-Metal and H-Wood. The strike is equipped with a blocking system that withstands 500 kg pulling force. This keep is extremely strong and the ideal solution for all your access control. SEH is available in two versions: E (Emissa - Fail Close) and R (Ruptura - Fail Open).

Specifications

- ✓ Type SEH.E: Emissa - Fail Close
- ✓ Type SEH.R: Ruptura - Fail Open
- ✓ Easy left or right changing
- ✓ For post profiles of 50 mm and more
- ✓ Voltage: 12V AC/DC
- ✓ Current Emissa: 1A
- ✓ Current Ruptura: 1,5A
- ✓ Water resistant & weatherproof
- ✓ Pressure resistance on self-latching bolt: 500 kg

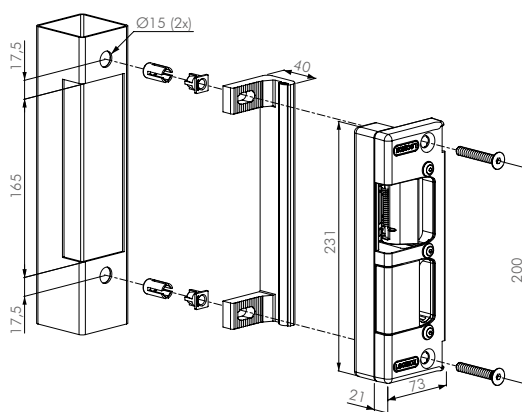

Compatible locks



Order codes

- SEH-E Electric strike, Emissa, Fail Close for H-Metal and H-Wood
SEH-R Electric strike, Ruptura, Fail Open for H-Metal and H-Wood



Surface mounted electric keep

MODULEC-SA (Patent pending)


Easy-to-install electric keep for surface-mounting thanks to the patented Quick-Fix. Easily interchanged with the SA keep. Can be connected to both 12V - 24V and AC/DC. Modulec-SA is available in two versions: E (Emissa - Fail Close) and R (Ruptura - Fail Open).

Stop plate color options

ALUM 6005 7016 9005

Specifications

- ✓ Tested up to 500.000 movements
- ✓ Fast and easy fixing with Quick-Fix
- ✓ Resistance to pressure on the latch bolt: 300 kg
- ✓ Same drilling pattern as SA, SH and SM keeps
- ✓ Easy left or right changing
- ✓ Corrosion-resistant: black anodised housing
- ✓ Adjustable for gate profiles: 40-60 mm width
- ✓ Voltage: 12V-24V AC/DC
- ✓ Consumption: 12V - 1,25A / 24V - 0,62A
- ✓ Power: 15W

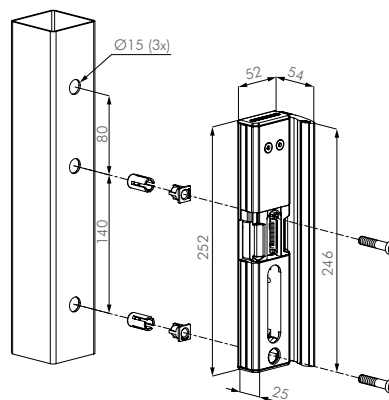

Compatible locks



Order code

MODULEC-SA-E Fail Close for surface mounted gate locks, 12-24V AC/DC

MODULEC-SA-R Fail Open for surface mounted gate locks, 12-24V AC/DC



Surface mounted electric security keep

MODULEC-SH (Patent pending)


Replace your SHKL keep with an electrical surface mounted keep with Fail Close / Fail Open functionality. Easy to install thanks to the patented Quick-Fix. For 12V-24V and AC/DC. Modulec-SH is available in two versions: E (Emissa - Fail Close) and R (Ruptura - Fail Open).

Stop plate color options

ALUM 6005 7016 9005

Specifications

- ✓ Tested up to 500.000 movements
- ✓ Resistance to pressure on the latch bolt: 300 kg
- ✓ Easy mounting with Quick-Fix
- ✓ Same drilling pattern as SA, SH and SM keeps
- ✓ Easy left or right changing
- ✓ Corrosion-resistant: black anodised housing
- ✓ Adjustable for gate profiles: 40-60 mm width
- ✓ Voltage: 12V-24V AC/DC
- ✓ Consumption: 12V - 1,25A / 24V - 0,62A
- ✓ Power: 15W

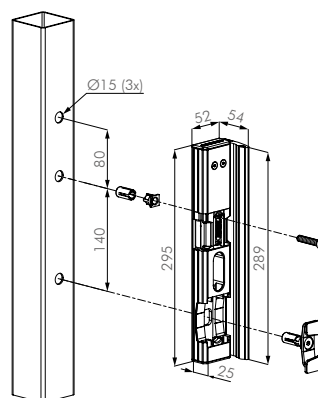

Compatible locks



Order code

MODULEC-SH-E Fail Close for surface mounted gate locks, 12-24V AC/DC

MODULEC-SH-R Fail Open for surface mounted gate locks, 12-24V AC/DC

BUILT-IN MAGNETIC LOCKS

A FULL CONCEPT FOR SWING GATES

MAGUNIT

High quality insert magnetic lock with guaranteed holding force and long durability. 500h salt spray resistant.

N-LINE-B-MAG

Aesthetic, adjustable and powder coated finishing profile for swing gates preventing people to stumble against protruding parts.

3006PULL

Elegant powder coated handle for easy opening and closing of the gate.

TIP

- Save time and order the all-in-one **N-LINE-B-MAG KIT**
- Make your gate self-closing with the powerful **VERTICLOSE-2** gate closer



Built-in magnetic lock

B FULL CONCEPT FOR SLIDING GATES



MAGUNIT

High quality insert magnetic lock with guaranteed holding force and long durability. 500h salt spray resistant.

N-LINE-S-MAG

Aesthetic, adjustable and powder coated finishing profile for sliding gates preventing people to stumble against protruding parts.

3006PULL

Elegant powder coated handle for easy opening and closing of the gate.



TIP

- Add access control to your gate with the strong, frost-free and watertight **SLIMSTONE** keypad (IP68)





Integrated magnet lock for swing gates

B-MAG-

Thanks to its assembly in the pole, this magnet lock can be installed invisibly and aesthetically, whilst maximal passage space is maintained. A quick assembly is done with Quick-Fix. It has a guaranteed tensile strength of 250 kg and resists to extreme weather conditions. The rubber bumpers prevent shaking of the gate, and damage to the gate and its accessories in case of harsh handling, and the flexible assembly of the armature plate guarantees a good closing even if the gate isn't perfectly aligned.




Color options

ZILV 9005

Specifications

- ✓ Guaranteed holding force tested on every Maglock
- ✓ 500h salt spray resistant! SGS certified (ISO 9227)
- ✓ Special two-layer protective coating developed for outdoor use
- ✓ Anti-residual magnetism kick-off system
- ✓ Minimal pulling force: 2500N (250 kg)
- ✓ Current: 460mA/12V or 230mA/24V

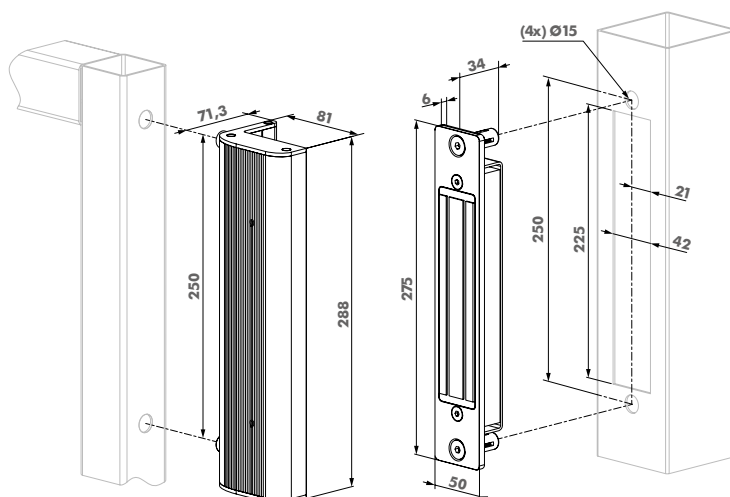

Order codes

B-MAG- Integrated magnet and bolt-on anchorplate for swing gates



Recommended products



SLIMSTONE-



PB-1



DVK-HD



DC-ACCESS-12V-20W



DC-POWER-12V-20W



DC-POWER-24V-25W

Set with magnet and anchorplate for N-LINE (B or S)-MAG profiles

MAGUNIT-2500

Set with a MAG-2500 and anchorplate along with fittings to combine with a N-LINE-B-MAG or N-LINE-S-MAG, 1 or more MAGUNITs can be mounted in the N-LINE profile.




Specifications

- ✓ Guaranteed holding force tested on every Maglock
- ✓ 500h salt spray resistant! SGS certified (ISO 9227)
- ✓ Special two-layer protective coating developed for outdoor use
- ✓ Anti-residual magnetism kick-off system
- ✓ Current: 460mA/12V or 230mA/24V
- ✓ Voltage: 12V / 24V DC
- ✓ Minimal pulling force: 2500N (250 kg)

Order codes

MAGUNIT-2500 Magnet and anchorplate for N-LINE-B-MAG and N-LINE-S-MAG profiles

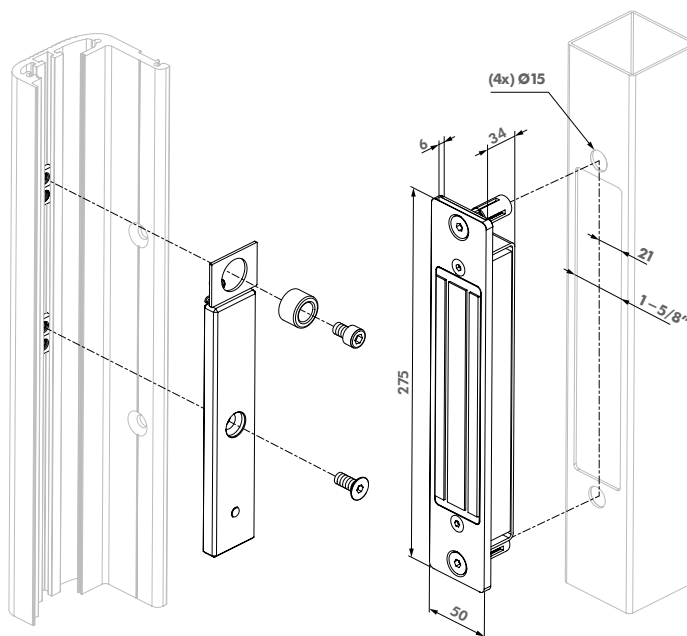

Required products



N-LINE-B-MAG-



N-LINE-S-MAG-





Aluminium finishing profile for swing gates to combine with MAGUNIT

N-LINE-B-MAG-

Adjustable, powder coated aluminium design profile for aesthetic closing of swing gates along with 1 or more MAGUNITs. Prevents passersby to stumble against the protruding MAG parts.

Color options

ZILV 9005

Specifications


- ✓ Profile length of 2 m
- ✓ Fast and easy fixing with Quick-Fix
- ✓ Powder coated aluminium housing
- ✓ Specially designed for exterior use



Compatible magnet



MAGUNIT-2500

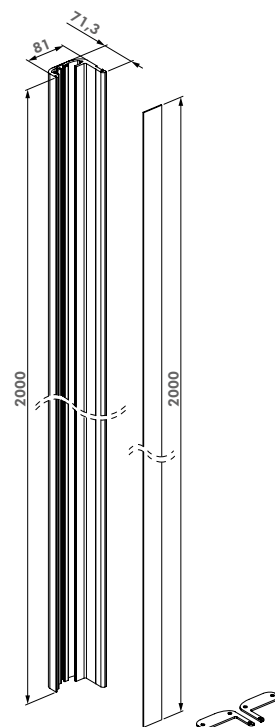

Order codes

N-LINE-B-MAG- Aluminium finishing profile for MAGUNIT-2500



Aluminium finishing profile for sliding gates to combine with MAGUNIT

N-LINE-S-MAG-

Adjustable, powder coated aluminium design profile for aesthetic closing of sliding gates along with 1 or more MAGUNIT-2500. Thanks to the integrated magnet and the armature plate, which are both integrated in the design profile, a safe and complete solution without any protruding components is guaranteed.

Color options

ZILV 9005

Specifications


- ✓ Profile length of 2 m
- ✓ Fast and easy fixing with Quick-Fix
- ✓ Powder coated aluminium housing
- ✓ Specially designed for exterior use



Compatible magnet



MAGUNIT-2500

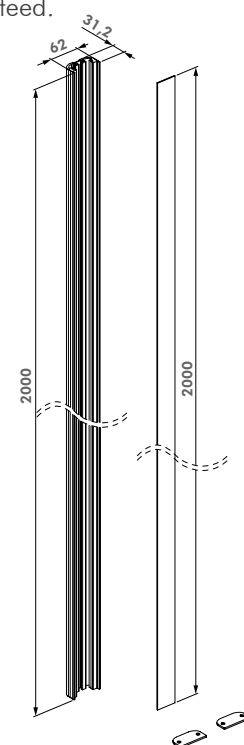

Order codes

N-LINE-S-MAG- Aluminium finishing profile for MAGUNIT-2500



FORWARD

Innovation as the engine
of your growth



MODULARITY

Designed with flexibility
at every moment



ADDED VALUE

High quality to ensure
your peace of mind



24/7 WEBSHOP

Order when
it suits you



FULL SERVICE

Exceptional
after-sales service



3 YEAR WARRANTY

Sustainable solutions in
the very long term



TRANSPARENCY

A sincere and clear
communication, day after day



RELIABLE

Our promises and
deadlines are always met



LOYAL

Long-term relationships and a
win-win situation for everyone

LOCINOX



Unit A, 12/F, Hung Mou Industrial Building,
62 Hung To Road, Kwun Tong,
Kowloon, Hong Kong

Tel : +852 2375 6110
Fax : +852 2406 2602

Email : enquiry@aub.com.hk
www.aub.com.hk